

TO BE INSTALLED BY A LICENSED ELECTRICIAN.

TURN OFF POWER FROM CIRCUIT BREAKER.


THESE INSTRUCTIONS ARE NOT INTENDED FOR USE BY A NON LICENSED PROFESSIONAL

AAMSCO LIGHTING INC  
100 LAMP LIGHT CIRCLE  
SUMMERVILLE, SC 29483  
843-278-0000 PH  
WWW.AAMSCO.COM

#### TO REPLACE 662 SOCKET SET

*Take note or mark which side of the fixture the sockets are positioned (Black wire versus White wire) and be sure to install the new sockets in same order. New Socket Set comes with Black wire with Gold connector and White wire attached.*

- Socket with black wire is connected to a metal tab on the safety switch. Disconnect from safety switch by pulling out gold connector from metal tab. Do not bend, pull straight out to avoid damage to the tab or connector.
- Lift off old sockets from base by unscrewing nuts from screws (2). Retain nuts for re-use.
- Replace new sockets in the same position as old ones.
- Re-attach nuts on the sockets and tighten.
- Slide GOLD connector (attached to black wire) onto safety switch.

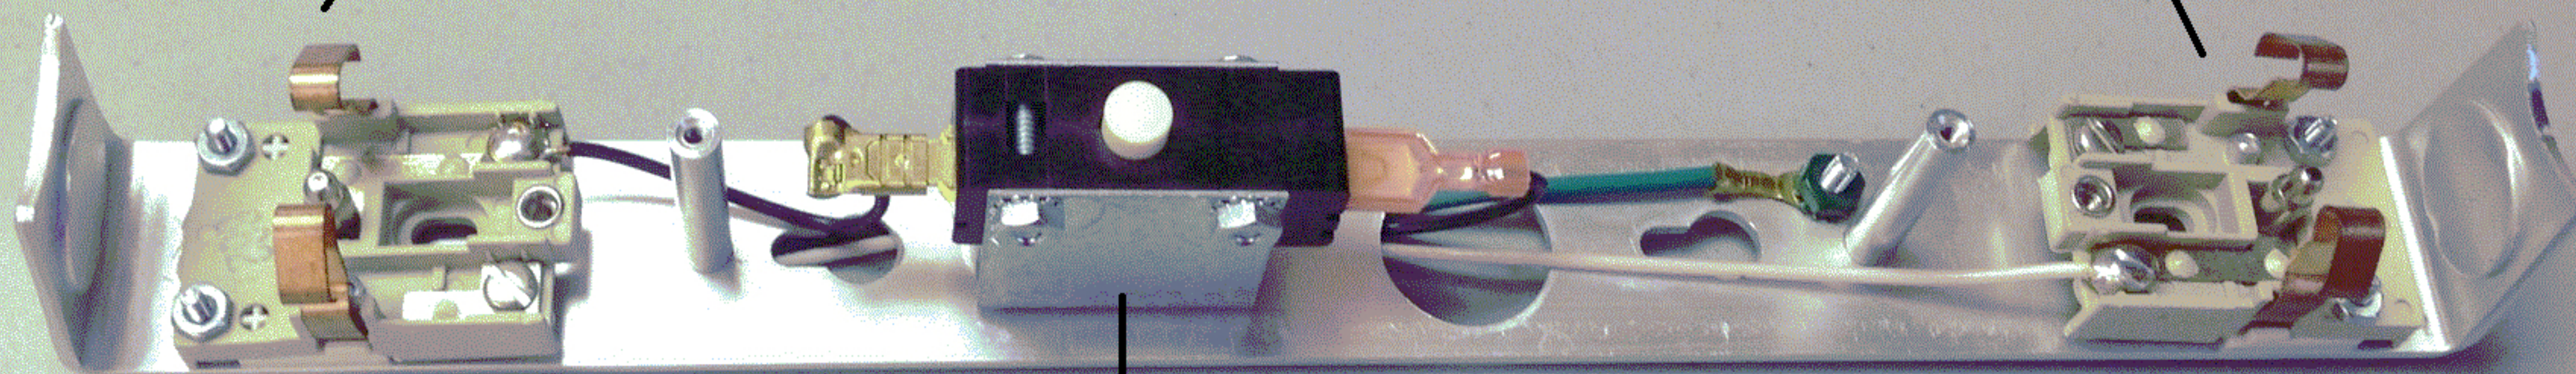

#### TO REPLACE SAFETY SWITCH

*Take note or mark the position of Safety switch.*

Pull out Connectors from terminal tabs on both sides of the safety switch, one GOLD and one PINK. Do not bend, pull straight out to avoid damage to tabs and connectors.

Unscrew lock-nut and remove screws (2), from U-bracket holding safety switch.

Position new Safety Switch in U-Bracket and re-attach using Screws and Lock-Nuts.

Fasten connectors unto metal tabs of safety switch, one GOLD on black wire attached to socket, and one PINK attached to hot black lead.