


# MIRROR-LUX® RST LED



# MIRROR-LUX® RST LED

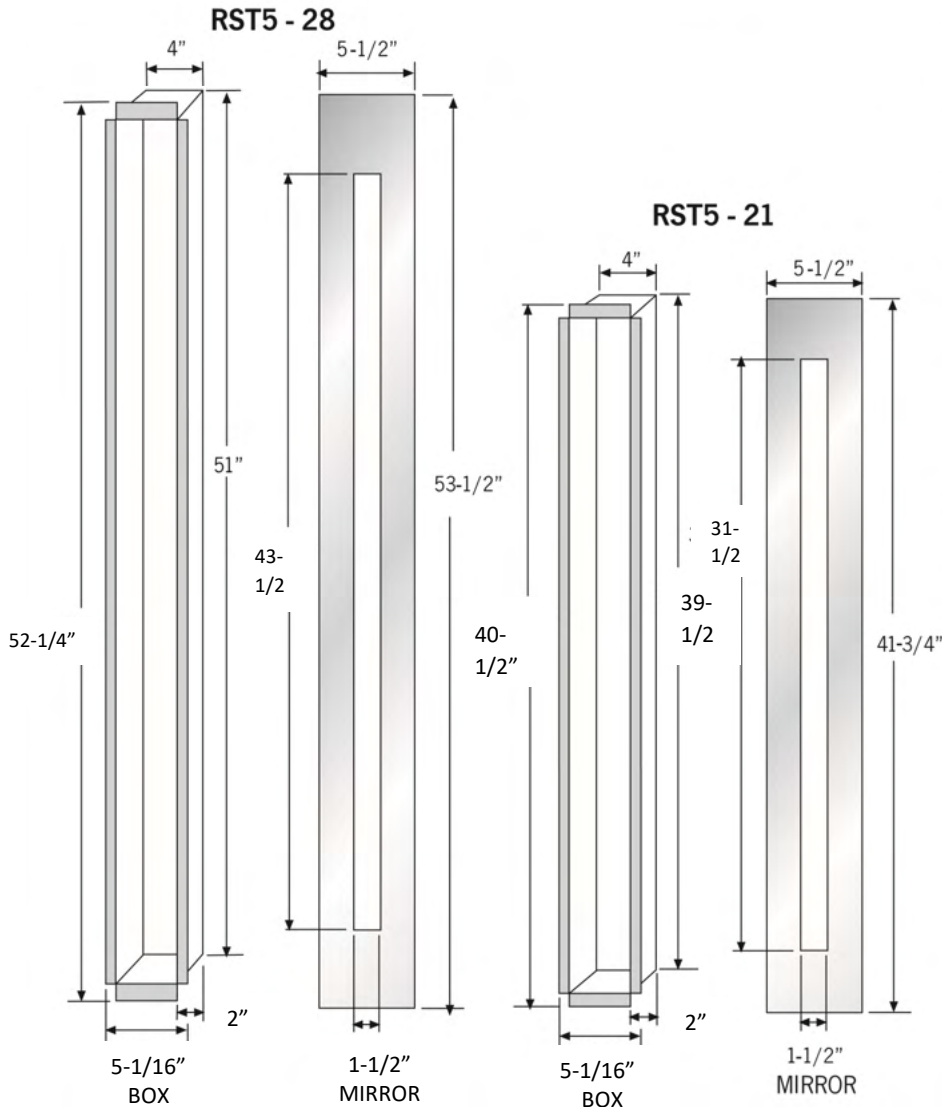

## TECHNICAL AND ORDERING DATA

### Standard Specifications


**Voltage:** 120V

**Driver:** Constant Current

**Dimming:** 0-10V Dimming

**Knockout:** Cable is inserted through 1/2" KOs. No electrical box is required. Knockout is positioned 3" from bottom & 3" from left side (box facing front).

**Mounting:** Four (4) holes provided for mounting to a mechanically sound surface 1 1/2" from top & bottom; 1" from the sides.



- ETL Listed for recessed damp locations.

\*Custom sizes and other color temps available; consult factory.

### ORDERING INFORMATION

Catalog #	Lamp Type	Wattage	Lumens	Color Temperature	CRI
RST-21LED/30K	LED MODULES	17W	896	3000K	>90
RST-28LED/30K	LED MODULES	16W	1170	3000K	>90



**AAMSCO LIGHTING, INC.** 100 Lamp Light Circle • Summerville, SC 29483  
1-800-221-9092 • Fax 843-278-0001 • [www.aamsco.com](http://www.aamsco.com)

\*Please note Aamsco reserves the right to vary placement of inserts and mounting features to accommodate manufacturing tolerances. Specifications outlined are subject to +/- 1/8" variance.