


MIRROR-LUX® RST LED



MIRROR-LUX[®] RST LED

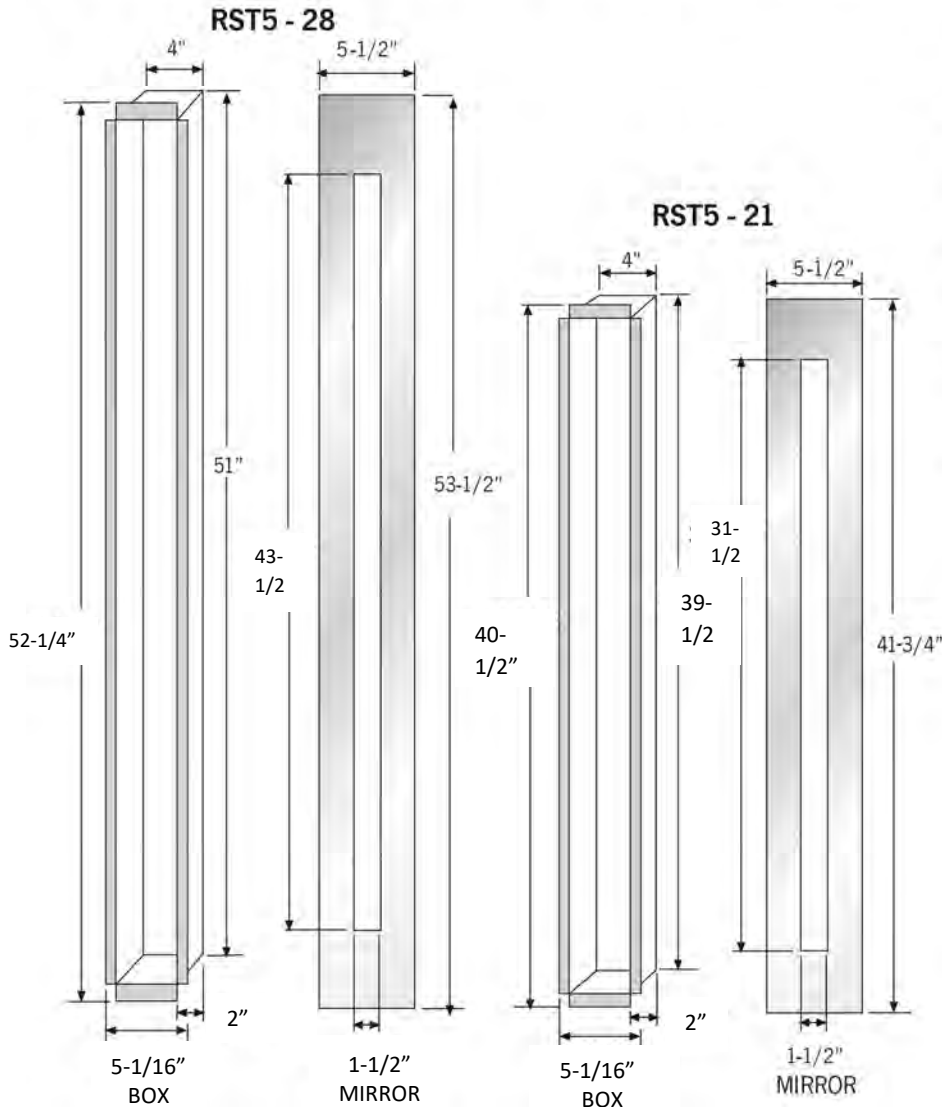

TECHNICAL AND ORDERING DATA

Standard Specifications


Voltage: 120V

Driver: Constant Current

Dimming: 0-10V Dimming

Knockout: Cable is inserted through 1/2" KOs. No electrical box is required. Knockout is positioned 3" from bottom & 3" from left side (box facing front).

Mounting: Four (4) holes provided for mounting to a mechanically sound surface 1 1/2" from top & bottom; 1" from the sides.



- ETL Listed for recessed damp locations.

*Custom sizes and other color temps available; consult factory.

ORDERING INFORMATION

Catalog #	Lamp Type	Wattage	Lumens	Color Temperature	CRI
RST-21LED/30K	LED MODULES	17W	896	3000K	>90
RST-28LED/30K	LED MODULES	16W	1170	3000K	>90



AAMSCO LIGHTING, INC. 100 Lamp Light Circle • Summerville, SC 29483
1-800-221-9092 • Fax 843-278-0001 • www.aamsco.com

*Please note Aamsco reserves the right to vary placement of inserts and mounting features to accommodate manufacturing tolerances. Specifications outlined are subject to +/- 1/8" variance.